


## Usage Instructions

1. **COLD WATER Dispensing:**
  - Push COLD Lever to dispense water
2. **HOT WATER Dispensing:**
  - Press & Hold Safety button then push Hot Lever to dispense water

## Dimensions

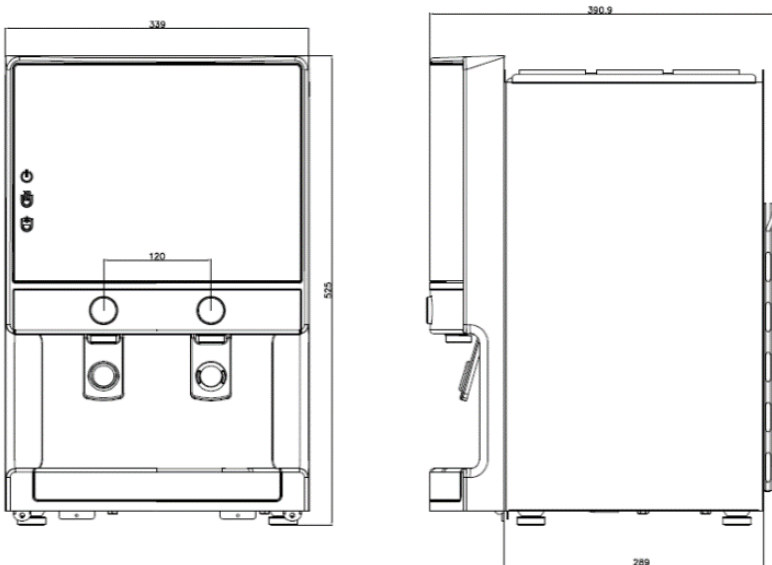

## Technical Specification

Description	CLIMA Piso	CLIMA Mesa
Recommended Serving PAX	15 - 25	Up to 10
Temperature	75 °c ~ 100 °c	75 °c ~ 100 °c
Tank Capacity	5L (HOT) 7.2L (COLD)	1.6L (HOT) 2.7L (COLD)
Unit Height (mm)	1200	530
Unit Width (mm)	340	340
Unit Depth (mm)	375	375
Electrical Specifications	AC200 – 240V: 50 – 60Hz Heating Power: 450W Cooling Power: 100W	
Weight	26.5kg	18.5kg
Origin	Korea	

## Support & General Maintenance

### Cleaning Instructions Dispenser:

Use a damp cloth to wipe the surfaces – Do not use cleaning agents that may cause discolouration and corrosion to the plated surfaces.

## Troubleshooting

### Leakage:

In the unlikely event of leakage, turn off the power supply and water valve supplying water to the modules and contact our Technical Support.

### Recommendations:

If water filtration unit is left unused for more than 2 days due to e.g. overseas travels, office closure etc., we highly recommend the following:

- Turn off the water inlet valve supplying water to the filtration
- When turning it back on for use, flush out the stagnant water within the system by turning on the tap for at least 2 minutes before consumption

Do not store hazardous chemical by-products such as cleaning agents and pesticides near the filtration system, so as to prevent any possible contamination.

### Swisspro Pte Ltd

15 Jalan Kilang Barat  
Frontech Centre #04-07  
Singapore 159357

Tel: +65 6276 1005

Fax: +65 6276 1504

Website: [www.swisspro.sg](http://www.swisspro.sg), [www.swissprowater.com](http://www.swissprowater.com)